


Patent Abstracts of Japan

TITLE : ELECTROMAGNETIC FLOWMETER

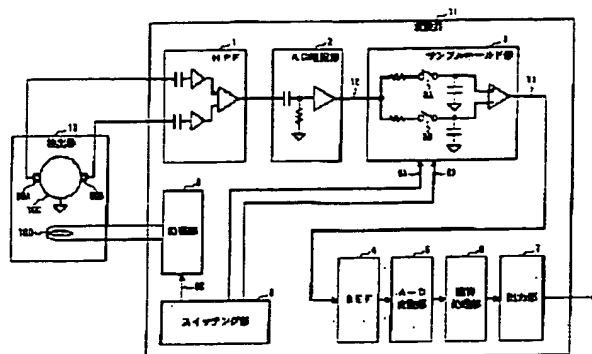

SOLUTION: The fluctuation of a DC flow signal 13 is generated in the differential frequencies between an excitation frequency f_{ex} and a commercial power supply frequency f_n , namely $f_{ex}-f_n$ (23) and $f_{ex}+f_n$ (24). Therefore, by providing a band attenuation filter BEF4 with a specific frequency characteristic at the later stage of a sample hold part 3 and attenuating differential frequency components 23 and 24 being included in the DC flow signal 13, fluctuation being generated due to the commercial power supply frequency noise can be attenuated. A DC flow signal 13 from the sample hold part 3 can be read as digital information via an A/D conversion part 5 in an operation-processing part 6, and a desired measurement flow value is calculated from a fluid flow rate by executing a specific operation processing before being converted to a specific signal by an output part 7.

COPYRIGHT: (C)1999,JPO

DOCID: <JP_411083575A_AJ_>